



Description:

PA-4500SV is a remote in-wall controller to work exclusively with PA-4500MX series amplifier. The in-wall controller or remote control panel enable to adjust its zone output volume up and down, also it can select all inputs of the amplifier to assign it output to its zone. It is remote controller for multiple zone multiple background music system.

Feature:


- Communication through CAT6 cable up to 999 m
- Direct power supply from matrix controller
- Audio sources selection and volume control
- 4 units capacity for each matrix controller
- Each unit for one separate room control up to 4 rooms
- Built-in Bluetooth player for local room media input use
- Exclusively work with amplifier PA-4120MX, PA-4240MX, PA-4350MX & PA-4500MX
- With ABS waterproof back box
- Visualized display of volume level and channel number
- RJ45 port to amplifier and cable wire connection to PA-4500SV
- Touch button control of digital green star technology
- In-wall flush mounting easy installation

Specification:

Model	PA-4500SV
Description	Remote control
Compatible Model	PA-4120MX, PA-4240MX, PA-4350MX & PA-4500MX
Power Consumption	3W
Zone Capacity	4 Zones
System Capacity	4 Remote control
Bluetooth	Built-in Bluetooth player for local room use
Frequency Response	20hz-20khz
THD	<1% at RMS,1KHz
S/N Ratio	>70dB
Operating Temp	-20°C to +70°C
Power Supply	Direct from the amplifier, 24V DC, ±20%
Humidity	<95% no condensation
Dimension	68x68x36.5mm
Weight	0.12kg

Rear Panel:

1. Volume -
2. Volume +
3. Output source Prev
4. Bluetooth switch
5. Output source Next
6. Display window
7. RJ45 port

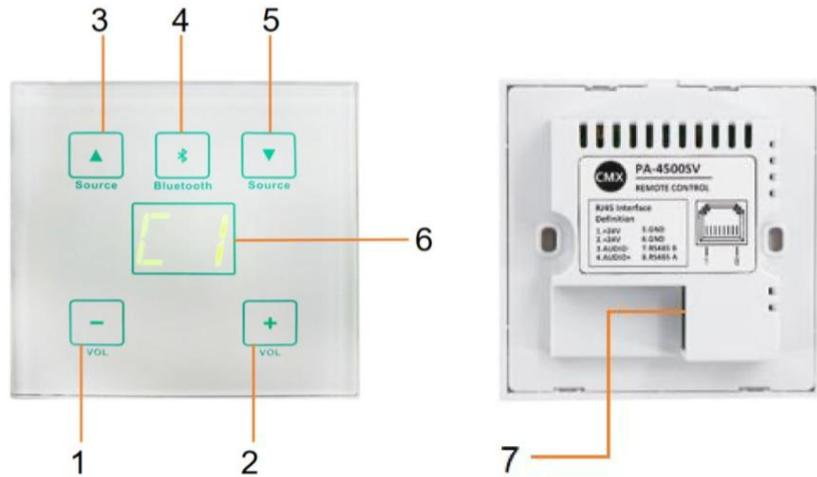

PA-4500SV DIP switch guide

