

85KG Door Closer OEP-K14-85



Overview

OEP-K14-85 door closer is designed to be mounted on the door head to close the door automatically, completely and timely by compression release after it was opened. It can be widely used in places with high safety requirements such as hospitals, smart communities, scenic spots, banks, business premises, parks, colleges, fire exits and other major entrances and exits.

Features

- Constant closing speed at various ambient temperatures, adjustable closing torque, closing speed and latching speed.
- Imported anti-freeze hydraulic fluid provides the product with a 2-year guarantee.
- Two-section speed adjustment, flexible installation on either left or right door leaf.
- 90° stop function: The door can stop and stay at 90° opening angle (please specify the function when ordering).
- Continuously adjustable closing speed in the range of 3s to 40s from 90°.
- Backcheck function: When the door is opened over 65°, the door closer can produce a certain damping force to prevent the door from opening too fast with excessive force which could result in door slamming to the wall.


Specifications

Model	OEP-K14-85
Hardware Specification	
Closing Force	EN4
Maximum Opening Angle	180°
Door Width Support	1100mm
Door Weight Support	85kg
MCBF	1 million
Operating Environment	Operating temperature: -30°C to 60°C, operating humidity: ≤95%
Dimensions (L x W x H)	205*42*64mm
Attestation	CE/FCC/ROHS

Ordering Info

Product Model	Description
OEP-K14-85	85KG Door Closer

Dimensions

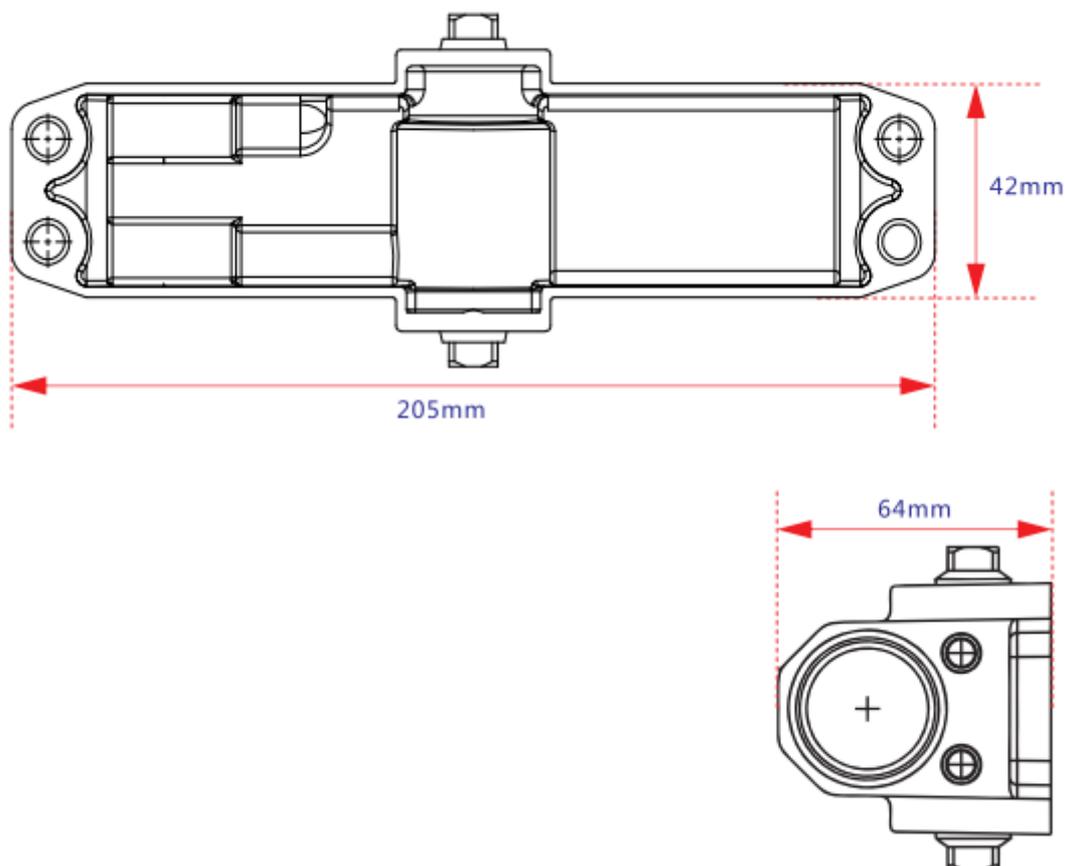

Unlimited New View

Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document.

Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.