

OEA-EL12 Electric Bolt Lock

OEA-EL12



Overview

OEA-EL12 electric bolt lock is suitable for general glass doors, wooden doors, metal doors, etc. with complete accessories including mounting brackets for frameless glass doors and narrow frame doors. With a lock body made of high-strength brushed anodized aluminum alloy, a coil that can work continuously at ultra-low temperatures, and the latest patented design, the product is strong, safe, and highly durable.

Features

- Ultra-low power consumption design, more durable and environmentally friendly.
- MOV surge protection.
- High-strength aluminum alloy lock body, stainless steel bolt.
- Ultra-low temperature design, more secure and durable.
- 500,000 power-on aging tests.
- Door status feedback.


Specifications

| Model | OEA-EL12 |
|------------------------|---|
| Hardware Specification | |
| Power Supply | DC 12 V±10% |
| Operating Current | 800mA |
| Standby Current | 110mA |
| Security Type | Failsafe |
| Operating Environment | Operating temperature: -30°C to +60°C, operating humidity≤95% |
| Weight | 0.72kg |
| Dimensions (L x W x H) | Lock housing: 205×35×42; Lock strike : 87×24×1.5 |
| Door Support | Wooden door, glass door, metal door, etc. |
| Attestation | CE/FCC/ROHS |

Ordering Info

| Product Model | Description |
|---------------|--------------------|
| OEA-EL12 | Electric Plug Lock |

Dimensions

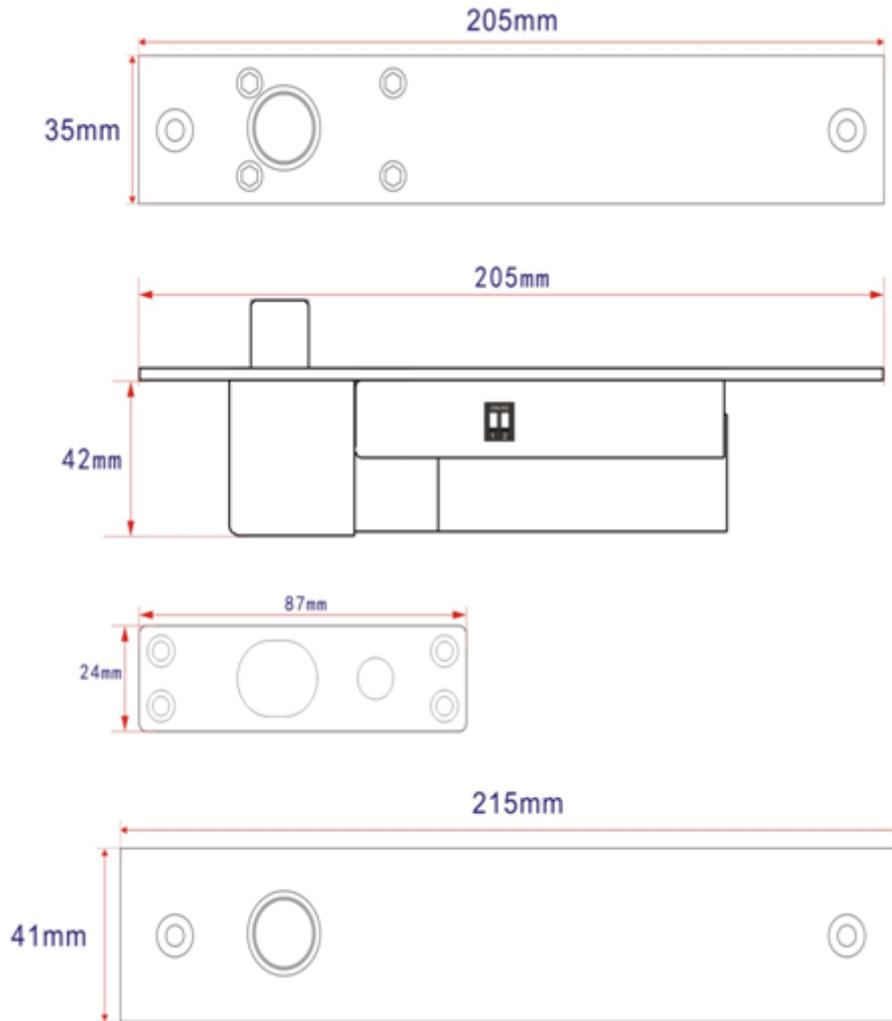

Zhejiang Uniview Technologies Co., Ltd.

- <http://www.uniview.com>
- overseasbusiness@uniview.com; globalsupport@uniview.com
- No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
*Despite our best efforts, technical or typographical errors may exist in this document.
Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.