
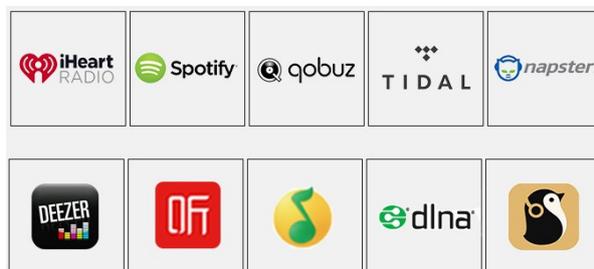
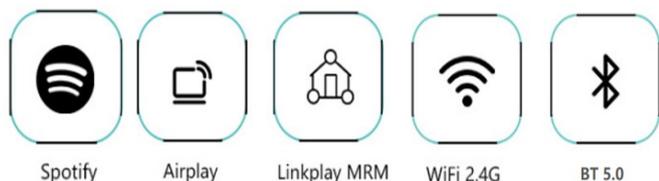


Wi-Fi Internet Streaming Amplifier with USB/SD/FM/Bluetooth EA-60AW/EA-120AW/EA-240AW/EA-350AW/EA-500AW/EA-650AW

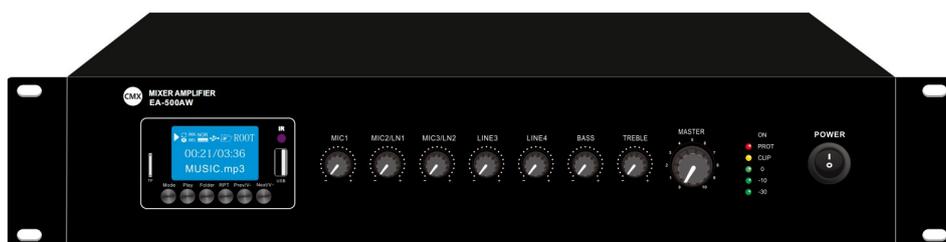

Description:

Wi-Fi Internet Streaming Amplifier delivering from 60W up to 650W output with Bluetooth and Wi-Fi streaming capability. Controlled from an Android or iOS smart phone, the Wi-Fi module is compatible with freely available apps to stream music and podcasts directly from a Wi-Fi network. Embedded internet radio offers high quality digital audio from almost any online radio station or podcast available worldwide. Subscription services can store online playlists which can be cast directly from the internet without requiring the smart phone to be connected to the network. Wireless streaming of tracks and playlists stored on the smart phone can be sent from within the app or directly via Bluetooth to the amplifier. In addition, the Wi-Fi Internet Streaming Amplifier has inputs for USB and TF card for playback of stored tracks. The Wi-Fi Internet Streaming Amplifier provides a versatile "hands off" background music solution for continuous playback of music from internet services or a choice of other sources for bars, cafes, restaurants, reception areas and house parties. The Wi-Fi Internet streaming Amplifier support multiple zone or multiple room of different music, while it also support multiple mobile to remote control over Wi-Fi, so remote volume and music control is easy for both commercial or home audio applications.

Feature:

- Compact mini size Wi-Fi Internet Streaming amplifier
- Tabletop Wi-Fi mixer amplifier with Mp3 player, FM radio & Bluetooth
- Wi-Fi streaming amplifier with smart phone control
- Free Wi-Fi Legacy Player app for Android or iOS
- Support Spotify, DLNA, airplay, internet radio and any online radio stations.
- Support multiple zone or multiple room of different music
- Support multiple mobile to remote control over Wi-Fi
- With LAN port and WPS to reset Wi-Fi address
- Rate power output at 60W, 120W, 240W, 350W, 500W to 650W
- Speaker output of 100V or 70V & 4 Ohm-8 Ohm-16 Ohm
- Mp3 player with USB/SD input on front panel, IR remote control for Mp3 player, FM radio and blue tooth
- LED indicators for power, clip, protect and signal
- Mic1 of balanced XLR input with dipswitch of phantom power on/off & highest VOX priority on/off
- Mic/line2-3 switchable inputs unbalanced 6.3mm jack
- Line 1-2 input of RCA input and one RCA line output
- Volume control for Mic1-3, line1-2, bass/treble and master
- Complete amplifier protection includes short-circuit, clip, overload and high temp

Wi-Fi Internet Streaming Amplifier with USB/SD/FM/Bluetooth EA-60AW/EA-120AW/EA-240AW/EA-350AW/EA-500AW/EA-650AW

Specification:

Model	EA-60A	EA-120A	EA-240A	EA-350A	EA-500A	EA-650A
Description	Wi-Fi Internet Streaming Mixer Amplifier with USB/SD/FM/Blue Tooth					
Rated Power Output	60W	120W	240W	350W	500W	650W
Speaker Outputs	100V or 70V & 4 Ohm-8 Ohm-16 Ohm					
Connector	Mic1 input by balanced XLR with phantom power & VOX highest priority Mic/line switchable input 2-3 unbalanced 6.3mm jack Line1-2 inputs by RCA; Line output by RCA					
Input	MIC1-3: 5-8mV, 600Ω; Line, 150-470mV, 10KΩ, unbalanced RCA					
Line Out	0.775(0dBV)					
Frequency Response	60Hz-15kHz(±3dB)					
S/N Ratio	Line ≥ 85dB, Mic≥ 72dB					
THD	Less than 0.5%					
Protection	Short-circuit, clip, overload and high temp protection					
Power Consumption	80W	150W	310W	450W	650W	800W
Power Supply	AC230V; 50-60Hz					
Dimension	484×405×88mm					
Weight	7.0kg	7.1kg	8.6kg	8.7kg	8.9kg	9.5kg

Wi-Fi Muzo Player:

Intuitive App

Download for free in the App Store or Google Play Store today




Legacy Player

Linkplay Multi-Room Audio Solution



Wi-Fi Internet Streaming Amplifier with USB/SD/FM/Bluetooth EA-60AW/EA-120AW/EA-240AW/EA-350AW/EA-500AW/EA-650AW

Rear Panel:

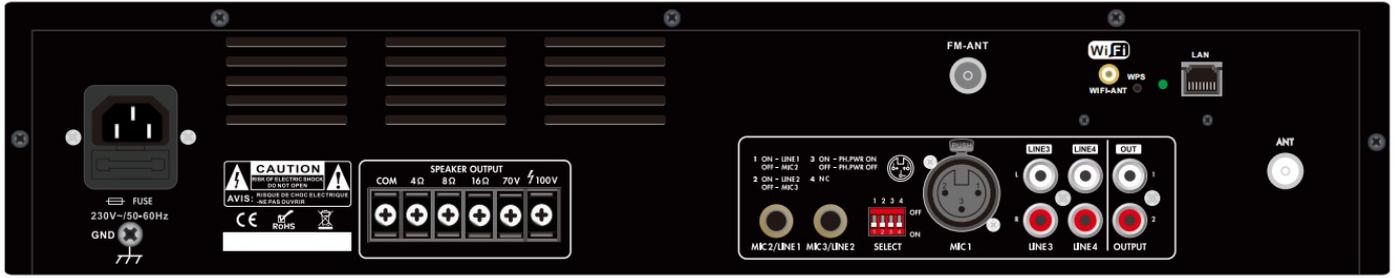

Connection Diagram:

